adaptivmini.

Adaptiv Mini Fitting & User Guide

ADVM-MB2
Mercedes-Benz NTG5.0 with 7" or 8" Display

WWW.ADAPTIV-MULTIMEDIA.COM

Adaptiv Mini

Adaptiv Mini allows HDMI & Camera input to the OEM screen.



This plug and play Mini interface adds HDMI to connect your Apple or Android device, allowing you to mirror your smartphone display on the vehicle's original screen. Inputs for front and rear aftermarket cameras also come as standard with the Mini.

Application

For Mercedes-Benz vehicles with NTG5.0 with 7" or 8" Display.

Kit Includes

Adaptiv Interface
Vehicle Harness

Prior to installation

Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources. Connects2 cannot be held responsible for the installation of this product.

Technical Support

Connects2 want to provide a fast and suitable resolution should you encounter any technical issues. With this in mind, when contacting Connects2, try to provide as much Information as possible. This will speed up the process and help us to help you.

Please use our dedicated online technical support centre: support.connects2.com

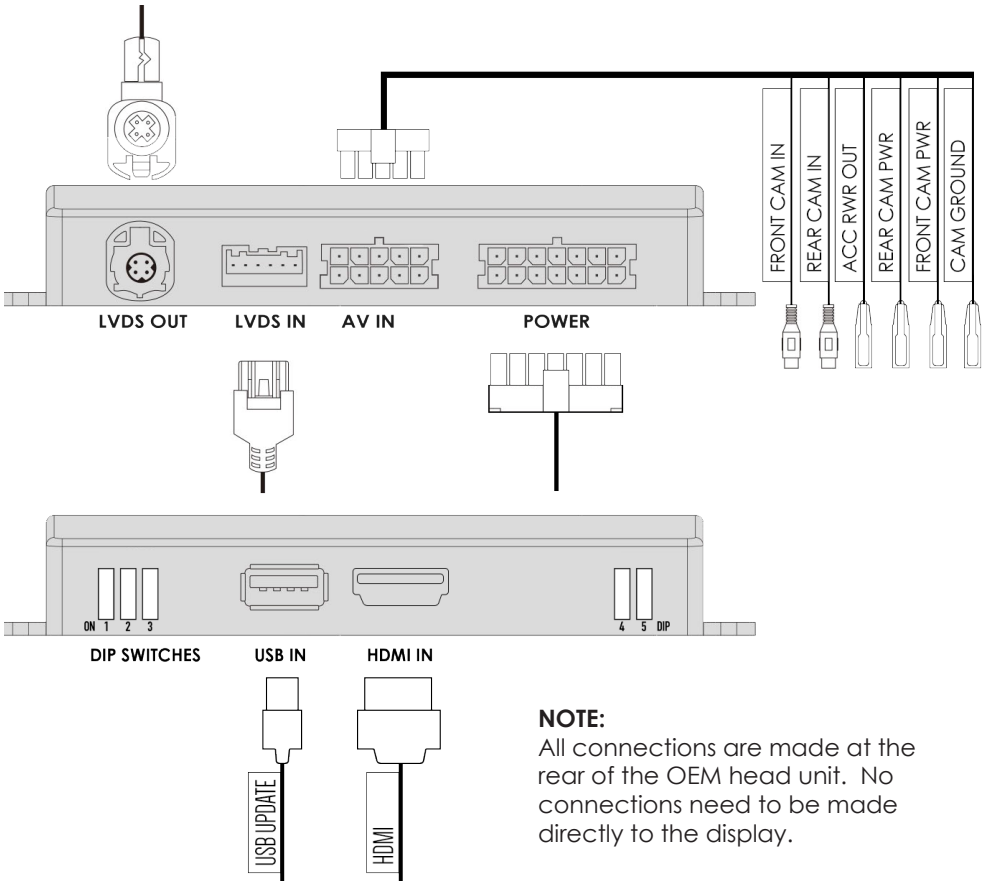

NOTE:
All connections are made at the rear of the OEM head unit. No connections need to be made directly to the display.

DIP SWITCH SETTINGS



DIP 1
If the vehicle has OEM reverse camera
(ON: YES OFF: NO)



DIP 3
If the vehicle has after-market reverse camera
(ON: YES OFF: NO)



DIP 2
If the vehicle has after-market front camera
(ON: YES OFF:NO)



DIP 4
7" Display - **OFF**
8" Display - **ON**
DIP 5
OFF

Button Configuration

Button 1 - Back Arrow

HDMI Access

Connect the USB dongle supplied to the vehicles USB input**. Select USB source from the OEM menu sources. The dongle will appear as 'USB AUX'.

Hold **BUTTON 1** for 2 seconds to switch between OEM screen and Adaptiv Mini HDMI screen

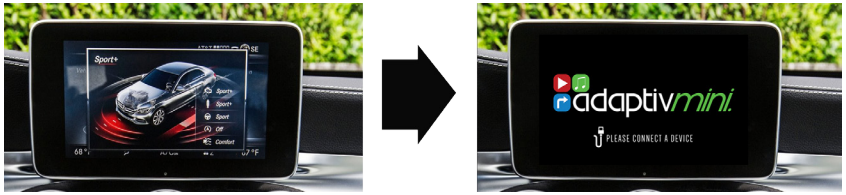

Video In Motion Warning - 10 MPH

Double press **BUTTON 1** to disable the video in motion warning message

Rear and Front Camera Access

From either HDMI mode or OEM mode

1. Select reverse gear for reverse camera
2. Deselect reverse gear - will go to after market front camera (if DIP 2 ON)
   To cancel front Camera Drive over 10 MPH

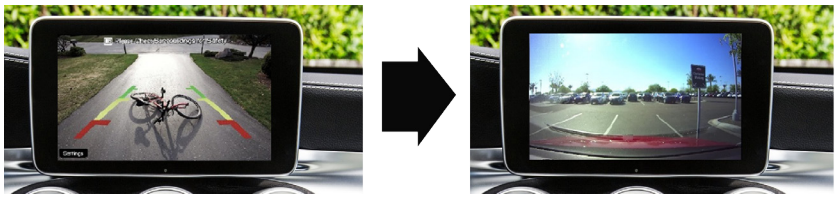

Front Camera Access

Double Press **BUTTON 1** to enter the front camera screen (if DIP 2 is ON)

View Version Number

Hold **BUTTON 1** Button for 8 seconds to enter firmware information screen

**Note that there may be a slight delay in HDMI audio lip sync , due to the USB audio buffer time of the OEM system. This is dependant on manufacturer original equipment specification.